
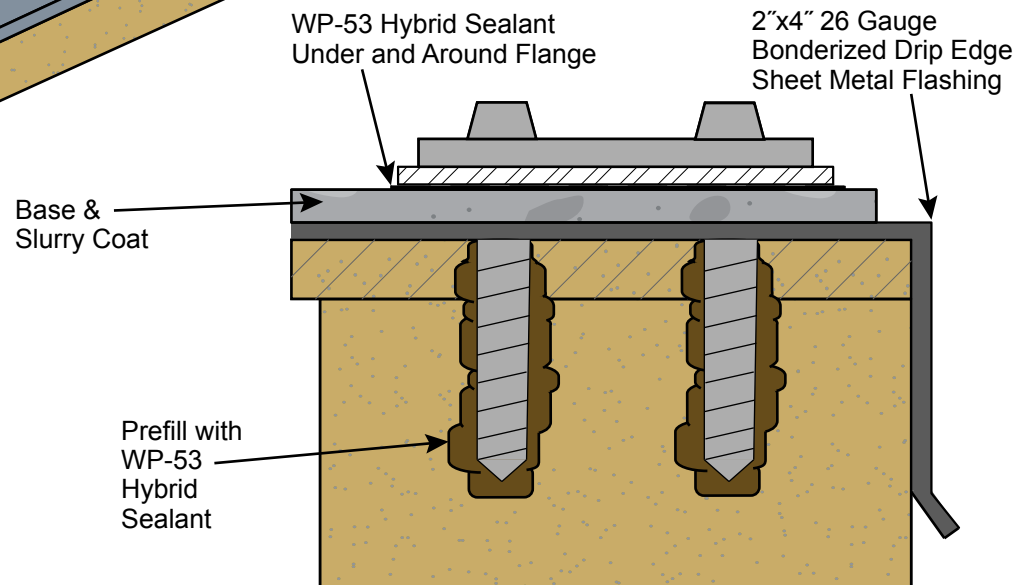


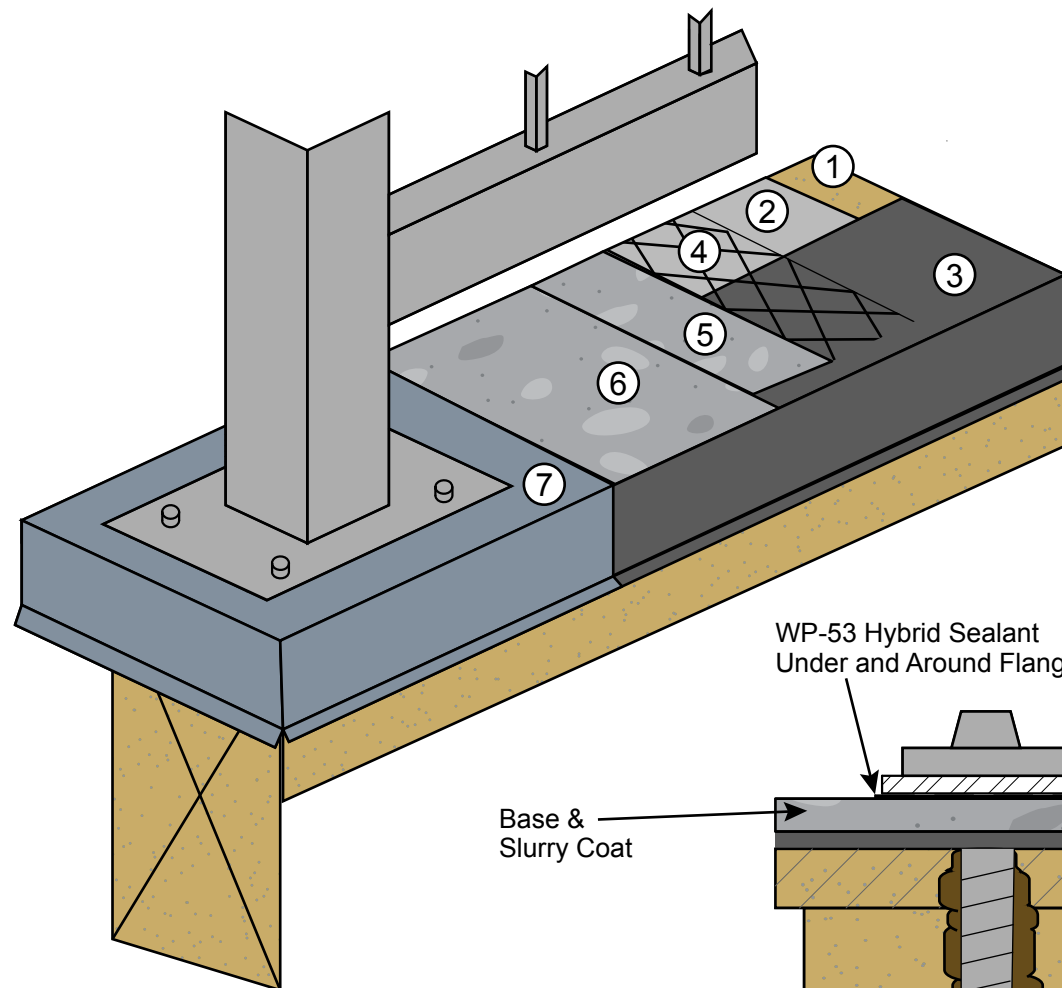

SIDE PROFILE

## KEYNOTES

- ① Plywood (by others)
- ② WP-40 Sheet Membrane
- ③ 26 ga. Bonderized Metal Flashing
- ④ WP-25 Metal Lath or WP-30 Glass Lath
- ⑤ Base Coat
- ⑥ Slurry Coat
- ⑦ Texture Coat & Topcoat

IAMPO ER-587

POST TO BE INSTALLED ON TOP OF  
SLURRY COAT.

TEXTURE COAT SHOULD BE APPLIED  
AFTER POST FLANGE INSTALL

- For maximum adhesion, WP-43 Sheet Membrane Primer should be used.
- Standard overlap is bottom to top with a 4" overlap.
- Apply WP-53 on all flashing seams and overlaps.
- Minimum 5/8" exterior grade plywood.
- Minimum 1/4" slope required on all decks
- Refer to local building codes and standards.
- Refer to all related Product and System Specifications for additional information.
- Shows best option for top mount. Side mount is recommended for all railings.

All details are for reference only and should be evaluated by architect. These details are not a substitute for specifications, plans or evaluation reports. Architect, consultant or similar professional should be review prior to major waterproofing applications.

REV.11/14/25 TC

## ALX SYSTEM - TOP MOUNT RAILING DETAIL

DIVISION 07 18 13  
Pedestrian Traffic Coatings

SCALE : NTS



**westcoat**

4007 Lockridge Street • San Diego, CA • 92102  
800.250.4519 • westcoat.com