


westcoat®

ALX INTERIOR



WATERPROOF

RELIABLE MOISTURE BARRIERS

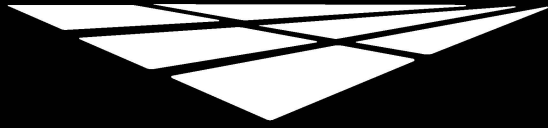

westcoat®

ALX INTERIOR SUBMITTAL PACKAGE


DIVISION 7 – THERMAL AND MOISTURE PROTECTION

SECTION 09 97 26 CEMENTITIOUS COATINGS

PLYWOOD SURFACES

TABLE OF CONTENTS

System Brochure	3-5
System Specification Sheet	6-11
CSI Specification	12-16
Color Chart	17-18
Sample Warranty	19-20
General Maintenance	21-23

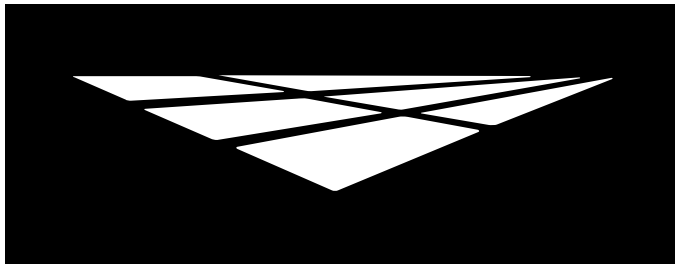

westcoat®

SYSTEM BROCHURE



westcoat.
SPECIALTY COATING SYSTEMS

ALX



ABOUT ALX

Experience unmatched strength, durability, and design with ALX™, Westcoat's waterproof deck coating system. Formulated for plywood surfaces, the ALX system integrates acrylic resins and cement blends into a reinforced, galvanized metal lath. Transform an interior wood subfloor to a decorative concrete or epoxy finish with ALX Underlayment system - a blank slate for installing tile, epoxy or other decorative flooring options.



REBUFFS RAIN, SNOW + SPILLS.

- Extensive Testing and Certifications
- Provides Early Protection After Framing
- Low Maintenance
- Unlimited Decorative Options
- Cost Effective
- Exterior or Interior
- Solar Reflective Option is CRRC approved.



FOR PROFESSIONAL USE ONLY.



westcoat.com / 800.250.4519 / info@westcoat.com




**IAPMO ER-587 • Class A and One Hour Fire Rated • City of LA Approval
Meets Wildland Urban Interface (W.U.I) Requirements**

THE SYSTEM

Westcoat ALX is a waterproof walking deck system that is reinforced with metal lath and installed with a series of three separate polymer-modified cementitious applications and sealed with Westcoat's SC-10 Acrylic Topcoat or clear sealer. The finished system weighs approximately 2½ lbs per square foot and is less than a 1/4" thick. ALX gives plywood the look and feel of concrete with a decorative appeal. This system can be installed with a custom finish for exterior or interior. Go ALX Pro with an added layer of fiberlath reinforced membrane.

ALX PRO Standard Finish

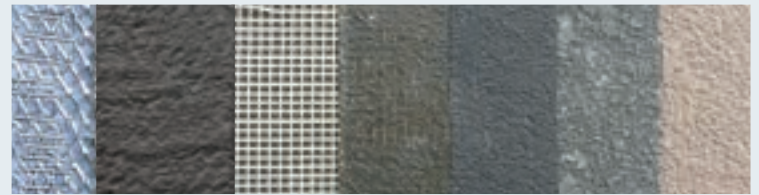


Sheet Membrane w/ Metal Lath Base Coat Fiberlath w/ Resin Membrane Slurry Coat Texture Coat Topcoat

INTERIOR

ALX Interior transforms a plywood subfloor into a concrete-like finish. Finish this system with a smooth decorative coating such as a microtopping or epoxy flooring system.

ALX Interior

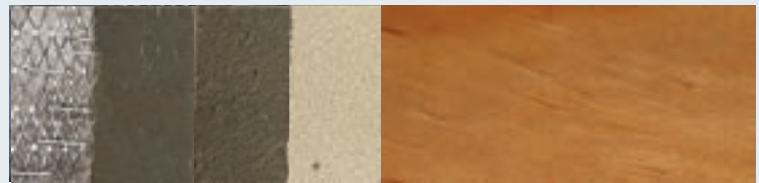


Sheet Membrane w/ Metal Lath Base Coat 2nd Base Coat Slurry Coat Custom Finish (Shown Here with Liquid Dazzle)

WATERPROOFING UNDERLAYMENT


This process is for waterproofing plywood decks to receive tile, stone, or concrete as the finished look. Protect your plywood right after framing and allow for other trades to "traffic" during the construction process.

ALX UNDERLAYMENT

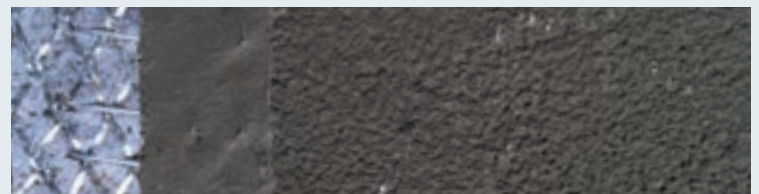

Sheet Membrane w/ Metal Lath Base Coat Slurry Coat



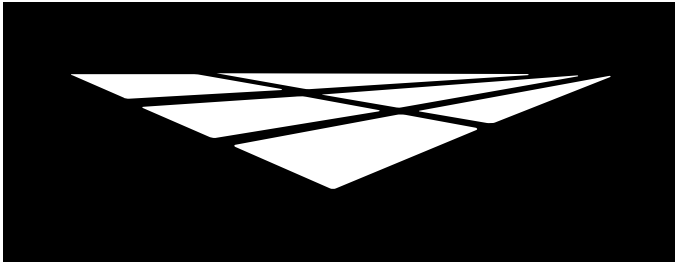

westcoat®

SYSTEM SPECIFICATION SHEET

		westcoat®	SYSTEM SPECIFICATION
WP	WATERPROOF RELIABLE MOISTURE BARRIERS	ALX™ Interior Custom Finish	


Description

The ALX™ Interior System is a series of polymer modified cementitious coatings that are bonded to plywood, with a variety of optional finishes and sealers. ALX™ Interior is a decorative topping designed to resurface plain plywood subfloor into a decorative, durable, water resistant, concrete like finish.

Uses

The ALX™ Interior System can be used on residential as well as commercial floors. ALX™ Interior is perfect for use in living areas, lobbies, offices, restaurants and hotels or wherever a thin, decorative and durable floor finish is desired over plywood.

System Overview

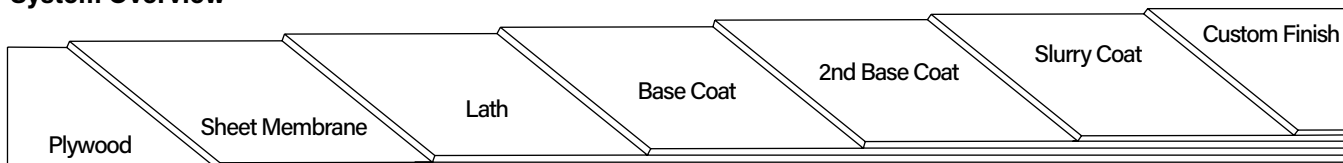

System Data

Coverages	Base Coat	2nd Base Coat	Slurry Coat	Finish Coat	WB Stain	EC-36 Sealer	SC-65F Sealer
	30-40 ft² per batch	150 ft² per batch	200-250 ft² per batch	250-350 ft² per batch	150-400 ft² per gallon	200-500 ft² per gallon	400-650 ft² per gallon

Components	Shelf Life
WP-25 Metal Lath	N/A
or	
WP-30 Westcoat Glass Lath	5 years
WP-10 Staples	N/A
WP-40 Sheet Membrane	1 year
WP-81 Cement Modifier	2 years
TC-1 Basecoat Cement	1 year
TC-2 Smooth Texture Cement	1 year
TC-4 Fine Texture Cement	1 year
TC-40 Liquid Colorant	1 year
SC-35 Water-Based Stain	2 years
EC-36 100% Solids Epoxy	2 years
SC-65F WB Flat Polyurethane Sealer	1 year
CA-33 Aluminum Oxide #320	N/A

Note: System components may vary, depending on desired result. See "Optional Materials" at the end of this sheet.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



Advantages

Cost-effective • Minimal Downtime • Low Maintenance • Long Lasting • Optional Skid Resistance
 • Unlimited Color Variations • Patterns • Can be Installed Solvent Free and low VOC • Typically under ¼ inch thick • May contribute to LEED credits • Aluminum Oxide Finish

Inspection

For installation of the ALX™ Interior system, plywood must be minimum ¾ inch CDX or exterior grade. For applications over pressure-treated lumber, please contact your Westcoat Representative prior to application. The plywood substrate shall be tongue and groove, properly blocked and nailed (glued and screwed is best). Plywood shall have a maximum joist span of 16 inches. Deflection should be less than L/360. OSB is not a suitable substrate for this material. Moisture vapor commonly collects in areas below a vapor barrier, such as the waterproofing membrane of the deck covering system. Venting must be added to help relieve moisture vapor transmission. Please refer to all local building codes regarding venting requirements.

Preparation

Be sure the surface is clean, dry and free of grease, paint, oil, dust or any foreign material that may prevent proper adhesion. "Dry" plywood is typically defined as having less than a 10% moisture reading or by showing no moisture with a plastic sheeting test. Applicator is responsible for ensuring that the substrate is acceptable for application. Do not apply to wet plywood.

Sheet Membrane

Westcoat requires the installation of 6 inch WP-40 Sheet Membrane to all plywood seams for reinforcement. WP-40 can be installed to the entire floor when maximum protection is required. See Sheet Membrane Product Specification Sheet.

Lath

The ALX Interior System can be installed with either WP-25 Metal Lath or WP-30 Westcoat Glass Lath. For maximum protection against corrosion, WP-30 is recommended. Place lath on the plywood and cut it to fit the area, making sure the edge of the lath is offset two inches from any parallel plywood seams. The lath should run across the grain of the plywood (across the long seams). If using WP-25, the metal lath should be placed so that it curves down at the edge of the deck. If using WP-30, unroll lath and place curl side down.


The lath should be held back ½ inch from all edges. This will allow the coating material to be feathered with a brush. With the lath in place, start in the center working your way out, stapling the lath using 16-20 staples per square foot (minimum 1 inch crown x 5/8 inch long, 16-gauge, non-corrosive WP-10). Stainless steel staples should be used for maximum protection against corrosion. Overlap the lath 1-2 inches and staple every 1-2 inches along the seam. With a hammer, pound down any seams or staples that are higher than the lath. When using WP-30, ensure that the lath is secured properly to the plywood. This is especially true at all overlaps and edges. It is recommended that the Base Coat be applied the same day as the lath installation.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
 800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 5
 ALX™ Interior 2/26

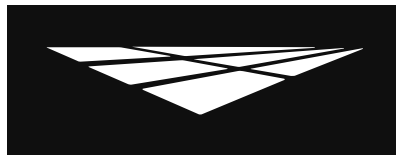**westcoat®****SYSTEM
SPECIFICATION****WP****WATERPROOF**
RELIABLE MOISTURE BARRIERS**ALX™ Interior****Custom Finish****Base Coats**

Pour 1 ¼ gallons of WP-81 Cement Modifier and desired water (up to one quart) into a clean mixing bucket and then add one bag of TC-1 Basecoat Cement. Mix until uniform with a mechanical mixer at a low rpm. Pour the mixture (4½ gallons total) onto the lath and with trowel on edge, smooth to the top of the lath at the rate of 40 square feet per batch when using WP-25 or 30 square feet per batch when using the WP-30. Trowel and brush the base coat up to the edge of the lath, leaving ½ inch of flashing exposed. For best results, tape off the flashing. Use a paintbrush to spread the base coat into all corners. Tap the deck with a hammer to help in smoothing out trowel ridges. As soon as it is dry, usually 1 to 2 hours at 70 degrees, scrape off any high spots or ridges that may prevent a smooth slurry coat.

A second coat must be applied by combining one gallon of WP-81 Cement Modifier and up to ½ gallon of water with one bag of TC-1 Basecoat Cement. Mix until uniform with a mechanical mixer at a low rpm. Trowel over the first basecoat at a rate of 150 square feet per batch. As soon as it is dry, usually 2 to 3 hours at 70 degrees, scrape off any high spots or ridges that may prevent a smooth slurry coat.

Slurry Coat

Create the slurry coat by combining 1 gallon of WP-81 Cement Modifier and up to ½ gallon of water in a clean mixing bucket then add 1 bag of TC-2 Smooth Texture Cement or TC-4 Fine Texture Cement. Mix until uniform with a mechanical mixer at a low rpm. Trowel the slurry mix over the surface to achieve a smooth finish. Apply the slurry coat, continuously keeping a "wet edge" and blend each new mix into the prior mix. After surface is dry, scrape or grind off any ridges or trowel marks. Coverage of the slurry coat is approximately 200 to 250 square feet per batch. You may sand before and after coats. A second slurry coat may be applied to create a more uniform surface.

Finish Coats

Combine one bag of TC-4 Fine Texture Cement with one gallon of WP-81 Cement Modifier and mix thoroughly with a mechanical mixer at a low rpm. Add ¾ to 1 gallon of water to achieve the desired consistency. Trowel the TC-4 as smooth or textured as desired. After the TC-4 has dried, lightly sand the surface with 120 grit or finer sand paper or sanding screen, to remove all trowel marks, if desired. Vacuum the entire area to remove all dust. Apply a second coat of TC-4 following the directions above. Coverage of the Finish Coat is approximately 250 to 350 square feet per batch.

WB Stain

Apply SC-35 using a pump sprayer, airless sprayer, HVLP sprayer, brush or broom. For a mottled effect, use water to pre-dampen the surface before or in conjunction with the stain. Multiple colors and various amounts of water may be applied at the same time for a variegated finish. SC-35 can be applied in multiple coats to achieve a solid color. Water-Based Stain can be thinned using water, up to equal parts. Thinning will affect the depth of color and may require extra coats.


The coverage will vary depending on the surface. Up to 400 square feet per gallon on a smooth surface and between 150-250 square feet on rough surfaces. Product performs best if applied in thin, even coats. When temperatures are above 80 degrees, it may be necessary to dampen the surface prior to application to prevent material from drying instantly.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

**westcoat®**

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

3 of 5
ALX™ Interior 2/26

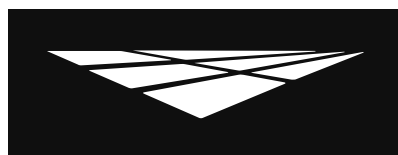

westcoat®

SYSTEM SPECIFICATION

WP

WATERPROOF
RELIABLE MOISTURE BARRIERS

ALX™ Interior

Custom Finish

Sealers

Mix 2 parts A and 1 part B (by volume) of EC-36 100% Solids Epoxy. Mix completely for 4-5 minutes and immediately get the mix onto the floor. Apply EC-36 with a $\frac{3}{8}$ inch, non-shedding, nap roller at 200-500 square feet per gallon. Coverage will vary greatly, depending on desired build. Do not allow material to sit in the mixing bucket. After the EC-36 has dried in about 8-10 hours, you may sand or scrape rough spots and apply a coat of SC-65F Water-Based Flat Polyurethane Sealer, for a low VOC, flat finish sealer (If the SC-65F can't be applied within 24 hours of the EC-36 application, then the EC-36 must be sanded and wiped with acetone, prior to application of the SC-65F).

Pre-mix each component of SC-65F WB Flat Polyurethane Sealer separately. In a clean bucket, mix 3 parts A with 1 part B (by volume) of SC-65F. SC-65F may be thinned up to 10% with potable water. Mix thoroughly with a low speed (200-300 rpm) drill motor for 2-3 minutes. Make sure to scrape the sides and bottom of the container during mixing. For maximum wear resistance, add $\frac{1}{4}$ to $\frac{1}{2}$ pound (~2-4 ounces by volume) CA-33 #320 and mix into activated product. Immediately after mixing, apply the SC-65F onto the substrate at a rate of 400-650 square feet per gallon using a "Dip and Roll" method. Roll with a $\frac{3}{8}$ inch, high-quality, non-shedding roller cover, being sure to maintain a wet edge. SC-65F may also be applied with an airless sprayer. For best results, two coats are recommended. To ensure an even finish, they must be applied within 24 hours or the cured material must be sanded and wiped with acetone, before application.

Optional Materials

Cement Options

- TC-2 may be used in place of the TC-4 as a finish coat, for a one coat system with a slightly more aggressive texture.
- TC-40 Liquid Colorant may be added to integrally color the cement in the finish coat.

Cement Modifier

- WP-82 can be used in place of WP-81 where odor is an issue.

Coloring Options

- For an optional method, use Westcoat SC-37 Nano Stain. Please read Product Specification Sheet prior to use.

Sealer Options

- EC-95G Gloss Polyurethane Topcoat or EC-95F Flat Polyurethane Topcoat may be installed over the EC-36 for the ultimate high build, mar and chemical resistant finish, where odor is not an issue.
- SC-65G WB Gloss Polyurethane Sealer can be applied over the EC-36 for a low odor, solvent free, mar and chemical resistant sealer.
- SC-65SG WB Semi-Gloss Polyurethane Sealer can be applied over the EC-36 for a low odor, solvent free, mar and chemical resistant sealer.
- EC-101 Polyaspartic 100% Solids may be used in lieu of the EC-36 as a high gloss, quick dry, high build, mar and chemical resistant finish.
- EC-102 Polyaspartic may be used in lieu of the EC-36 as a high gloss and quick dry finish.

Skid Resistance

- CA-29 Mini Safe Grip or CA-30 Safe Grip can be added to the final coat of sealer for added skid resistance.
- CA-33 Aluminum Oxide may be added to the topcoats for additional skid and wear resistance.

* Please refer to Product and System Specification Sheets for additional information.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



westcoat®

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

4 of 5
ALX™ Interior 2/26



Clean Up

Uncured material can be removed with soap and warm water or an environmentally-safe solvent. If cured, material can only be removed mechanically or with an environmentally-safe solvent.

Maintenance

Interior floors can be dust mopped daily or mopped using a neutral PH cleaner. For more information on floor care and maintenance, please refer to the General Maintenance sheet.

The ALX™ Interior System should be inspected for wear every 2 to 4 years. The system should be resealed with the appropriate Westcoat clear sealer every 3 to 5 years, depending upon traffic and UV exposure. Contact the original Installer of Westcoat for complete re-coating instructions.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea, irritation of nose, throat and lungs. Prolonged or repeated skin contact can cause slight skin irritation. Cements contain silicas, dust mask or respirator should be used when mixing, sanding or grinding.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Limitations

- This system is designed for professional use only.
- Read Product Specification Sheets for every product you will be using before beginning the project.
- Do not apply at temperatures below 50°F or above 90°F.
- Sealers will make the surface slippery, please be aware the texture of the surface and how the sealer will affect the look, feel and skid resistance.
- Approval and verification of proposed colors, textures and slip resistance is recommended.
- Use dustless equipment when possible.
- Light wheel and foot traffic only.
- Do not allow Westcoat products to freeze.
- Moisture vapor commonly collects in areas below a vapor barrier, such as the waterproofing membrane of the deck covering system. Venting must be added to help relieve moisture vapor transmission. Please refer to all local building codes regarding venting requirements.

Slip Precaution


Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

5 of 5
ALX™ Interior 2/26

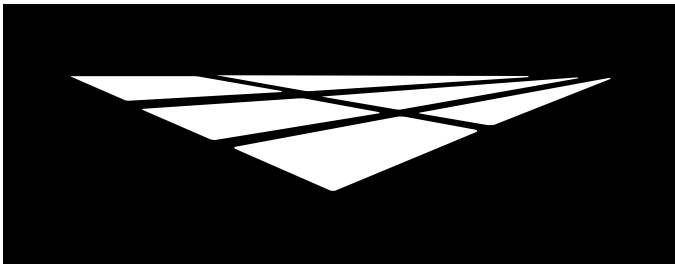

westcoat®

CSI SPECIFICATION



SECTION 099726 CEMENTITIOUS COATINGS

PART 1 GENERAL

1.01 SUMMARY

- A. Section includes: Provide a complete acrylic modified cementitious waterproof system for plywood surfaces that meet the requirements for specific use indicated in the contract documents. Include all applicable substrate testing, surface preparation, and detail work.

1.02 RELATED SECTIONS

- A. Specified elsewhere:
 - 1. Section 07 24 00 Exterior Insulation and Finish Systems
 - 2. Section 07 01 10.81 Waterproofing Replacement
 - 3. Section 07 10 00 Dampproofing and Waterproofing
 - 4. Section 07 14 00 Fluid Applied Waterproofing
 - 5. Section 07 14 16 Cold Fluid Applied Waterproofing
 - 6. Section 07 16 13 Polymer Modified Cement Waterproofing
 - 7. Section 07 18 13 Pedestrian Traffic Coatings
 - 8. Section 09 09 00 Finishes
 - 9. Section 09 94 00 Decorative Finishing

1.03 REFERENCES

1.04 SUBMITTALS

- A. Submit under provisions of Section 013300.
- B. Product Data: Submit manufacturer's product data sheets on each product and system to be used including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements.
 - 3. Installation methods.
 - 4. Maintenance requirements.
- C. Selection Samples: For each system specified, provide two sets of samples and color charts representing manufacturer's full range of colors and patterns.

1.05 QUALITY ASSURANCE

- A. All materials used in the pedestrian traffic system shall be manufactured and provided by a single manufacturer to ensure compatibility and proper bonding.
- B. Use adequate numbers of skilled workmen thoroughly trained and experienced in the necessary crafts and completely familiar with the specified requirements and methods needed for proper performance of the work of this section.
- C. Contractor shall have a minimum of 3 years experience installing pedestrian traffic coatings of this type which is required for this project and who is acceptable to the manufacturer.
 - 1. Applicator shall designate a single individual as project foreman who shall be on site at all times during installation.
 - 2. Contractor must show and have QCA Qualified Contractor/Applicator paperwork from the manufacturer of the coating system, as required to obtain a long-term jobsite specific warranty.

- D. Convene a pre-application meeting before the start of application of coating system. Require attendance of parties directly affecting work of this section, including: Architect, contractor, applicator, and authorized representative of the coating system manufacturer and interfacing trades. Review the following:
 - 1. Drawings and specifications affecting work of this section.
 - 2. Protection of adjacent surfaces.
 - 3. Surface preparation and substrate conditions.
 - 4. Application.
 - 5. Field quality control.
 - 6. Protection of coating system.
 - 7. Repair of coating system.
 - 8. Coordination with other work.

1.06 DELIVERY, STORAGE & HANDLING

- A. Delivery: Materials shall be delivered to the job site in sealed, undamaged containers. Each container shall be clearly marked with manufacturer's label showing type of material, color, and lot number.
- B. Storage: Store all materials in a clean, dry place with a temperature range in accordance with manufacturer's instructions.
- C. Handling: Handle products carefully to avoid damage to the containers. Read all labels and Material Safety Data Sheets prior to use.

1.07 PROJECT SITE CONDITIONS

- A. Maintain environmental conditions (temperature and weather) within the limits recommended by the manufacturer.
- B. Schedule coating work to avoid rain and excessive dust and airborne contaminants. Protect work areas from moisture and excessive airborne contaminants during coating application.
- C. Before any work is started, the applicator shall examine all surfaces for any deficiencies. Should any deficiencies exist, the architect, owner or general contractor shall be notified in writing and any corrections necessary shall be made.

1.08 WARRANTY

- A. Upon completion of the work in this section provide a written warranty from the manufacturer against defect of materials for a period of 5 (five) years. To obtain project specific warranty the coating system applicator must be a Westcoat Qualified Contractor/ Applicator and apply for warranty.

PART 2 PRODUCTS

2.01 MANUFACTURERS

- A. Acceptable manufacturer: Westcoat Specialty Coatings; 4007 Lockridge Street, San Diego, CA 92102. Telephone 800-250-4519. Fax 619-255-7187. Website: www.westcoat.com.

2.02 MATERIALS

- A. As basis of design Westcoat ALX Interior System (no substitutions will be accepted): Waterproof walking deck system that is reinforced with metal lath and installed with a series of three separate polymer-modified cementitious applications, and sealed with acrylic topcoat.

2.03 COMPONENTS

- A. ALX Interior System: Waterproof system for use over plywood substrates.
 - 1. Sheet Membrane: WP-40 Sheet Membrane 6 inch by 75 feet for plywood seams, or 36 inch by 75 feet for complete plywood coverage.

2. Lath: WP-25 Metal Lath 2.5 pounds per square yard hot dipped galvanized or WP-30 Glass Lath may be used.
3. Staples: Minimum 1 inch crown by $\frac{5}{8}$ inch long, 16 gauge non-corrosive WP-10 Staples or equal.
4. Base Coat: Combine one 50 pound bag of TC-1 Base Coat Cement, 1¼ gallons of WP-81 Cement Modifier, and up to 1 quart of water. Apply by trowel at 30 square feet per batch when using WP-30 or 40 square feet per batch when using WP-25.
A second coat must be applied by combining one gallon of WP-82 Cement Modifier and up to ½ gallon of water with one bag of TC-1 Basecoat Cement.
5. Slurry Coat: Combine one 50 pound bag of TC-2 Smooth Texture Cement OR TC-4 Fine Texture Cement, 1 gallon of WP-82 Cement Modifier, and up to ½ gallon of water. Apply by trowel at 200-250 square feet per batch.
6. Finish Coats: Combine one 50 pound bag of TC-4 Smooth Texture Cement, 1 gallon of WP-82 Cement Modifier, and up to ¾ to 1 gallon of water. Apply at 250-350 square feet per batch. Apply a second coat of TC-4 following the directions above.
7. WB Stain: Apply SC-35 using a pump sprayer, airless sprayer, HVLP sprayer, brush or broom at 150-400 square feet per gallon. SC-35 can be applied in multiple coats to achieve a solid color.
8. First Topcoat: EC-36 100% Solids Epoxy 200-500 square feet per gallon.
9. Second Topcoat: SC-65F Water-Based Flat Polyurethane Sealer 400-650 square feet per gallon.

2.04 ACCESSORIES

A. Supplemental Materials:

1. TC-2 may be used in place of the TC-4 as a finish coat, for a one coat system with a slightly more aggressive texture.
2. WP-81 may be used in place of WP-82, when low order is not necessary.
3. TC-40 Liquid Colorant may be added to integrally color the cement in the finish coat.
4. For an optional method, use Westcoat SC-37 Nano Stain. Please read Product Specification Sheet prior to use.
5. CA-29 or CA-30 Safe Grip can be added to the final coat of sealer for additional skid resistance.
6. Westcoat Slope Technique may be used when additional sloping is required. Slope Technique should be applied after the Base Coat, prior to the Slurry Coat.
7. WP-43 Sheet Membrane Primer may be used for increased adhesion of the WP-40 Sheet Membrane.

Optional Topcoats:

8. SC-65G WB Gloss Polyurethane may be used OVER the EC-36 when a low odor, solvent free, mar and chemical resistant gloss finish is required.
9. SC-65SG Pigmented WB Semi-Gloss Polyurethane may be used OVER EC-36 when a low odor, solvent free, mar and chemical resistant semi-gloss finish is required.
10. EC-95G Gloss Polyurethane Topcoat may be used OVER the EC-36 when a gloss, solvent-based polyurethane is required.
11. EC-95F Flat Polyurethane Topcoat may be used OVER the EC-36 when a flat, solvent-based polyurethane is required.
12. EC-101 Polyaspartic 100% Solids or EC-102 Polyaspartic may be used IN LIEU of the EC-36 when a high gloss, quick dry, polyaspartic topcoat is required.

PART 3 EXECUTION

3.01 EXAMINATION

A. Verification of conditions.

1. Inspect all surfaces to receive the pedestrian traffic system. Verify that surfaces are dry, clean, and free of contaminants that would prevent coating system from properly adhering to the surface.
2. Verify that substrates have ¼ inch slope per linear foot.
3. Before starting work, report in writing to the owner any unsatisfactory conditions.

3.02 SURFACE PREPARATION

- A. General:
 - 1. Prepare surfaces using methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
- B. Plywood substrate:
 - 1. Provide minimum 5/8 inch CDX exterior grade plywood.
 - 2. Plywood shall have a maximum joist span of 16 inches.
 - 3. Deflection should be less than L/360.

3.03 INSTALLATION

- A. Install coatings in accordance with manufacturer's instructions.
- B. Mix all materials in accordance with manufacturer's instructions.
- C. Use application equipment, tools, and techniques in accordance with manufacturer's instructions.
- D. Uniformly apply coatings at spread rates and in number of coats to achieve specified coverage.
- E. Adhere to all limitations, instructions, and cautions for pedestrian coatings as stated in the manufacturer's published literature.

3.04 FIELD QUALITY CONTROL

- A. Verify coatings and other materials are as specified.
- B. Verify coverages and finish of the system as work progresses.
- C. Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of coating systems.

3.05 PROTECTION AND CLEAN-UP


- A. Installation areas must be kept free from traffic and other trades during the application procedure and cure time.
- B. Protect finished surfaces of coating system from damage during construction.
- C. Touch-up, repair or replace damaged coating system after substantial completion.
- D. Clean area and remove all debris upon completion of work. Dispose of empty containers properly according to current Local, State and Federal regulations.
- E. Allow material to cure 4 to 6 hours before light pedestrian traffic is permitted, 24 hours before heavy traffic and an additional 48 hours before heavy objects are placed on the surface.

3.06 MAINTENANCE

- A. Contractor shall provide to owner, maintenance and cleaning instructions for the waterproof decking system upon completion of work. Owner is required to clean and maintain the surfaces to maintain manufacturer's warranty.

END OF SECTION

This guide specification has been prepared by Westcoat Specialty Coating Systems to assist design professionals in developing a project specific specification. This guide is a template that must be reviewed and adapted by specifiers to comply with project requirements. This guide specification is not to be copied directly into a project specification manual without review.

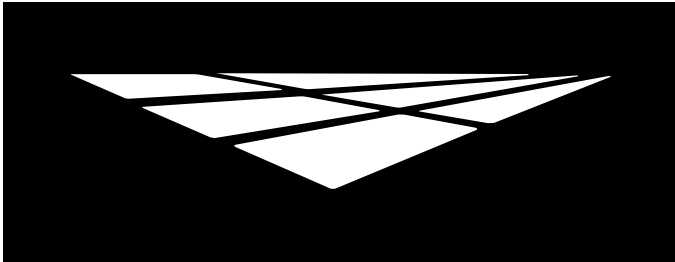

westcoat®

COLOR CHART



Applied over TC-4 Fine Texture Cement



Shale | 516



Armor | 514



Onyx | 509



Sienna | 513




Copper | 508



Adobe | 515




Sahara | 518

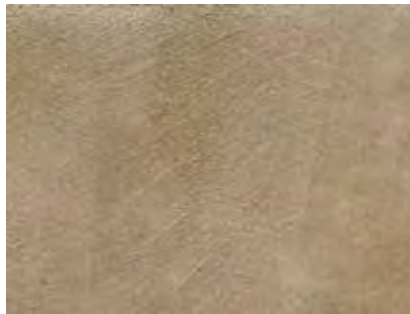


Umber | 521



Olive | 520

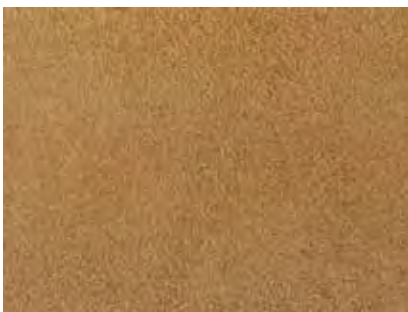

Camel | 505

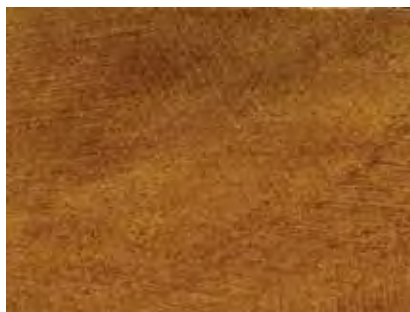

Sepia | 511



Mahogany | 501


Not shown but also available in Ivory | 517



CAUTION:


Color will vary between products and sheens. This chart is for reference only.
Please request an actual color sample or apply sample on site before beginning any project.



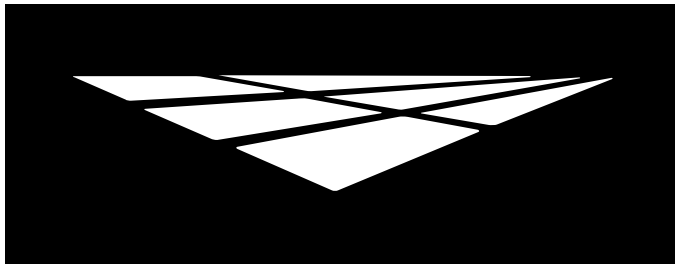

westcoat®

SAMPLE WARRANTY

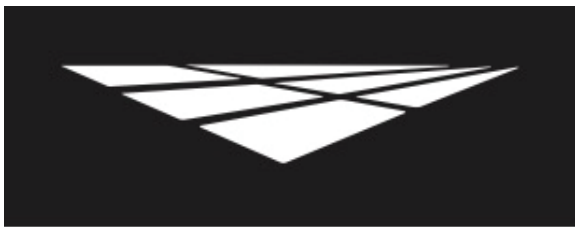

WARRANTY

WESTCOAT ALX INTERIOR MATERIAL WARRANTY

Subject to the conditions, limitations and requirements set forth below, Westcoat warrants the Westcoat ALX materials to be free of defects in the material for a period of five (5) years from the date of original purchase of the materials provided that the materials are installed by a factory trained state-licensed contractor enrolled in the Westcoat QCA program and subject to all terms and conditions set forth below. Westcoat disclaims any warranty for the labor or installation of the ALX materials.

If the Westcoat ALX materials fail due to defects within the warranty period, Westcoat, in its sole discretion, will either provide replacement materials for the defective ALX materials or reimburse the original purchaser in an amount not to exceed the original cost of the materials. Westcoat shall in no way be responsible or liable for any labor costs or any incidental or consequential damages, including without limitation, economic losses, lost profits, business interruption, loss of use, contribution, indemnity or other losses arising from the use of the ALX materials.

This warranty is limited to the original purchases and is non-transferable. This warranty is void if the ALX materials are: applied to the top of OSB; not properly maintained; not installed pursuant to the current system information sheet; and/or applied at any area that is not built in accordance with applicable building codes. The warranty is also void if all of the materials are not purchased from an authorized distributor of Westcoat.

This warranty does not apply to and Westcoat has no responsibility or liability for: (1) the condition or movement of the substrate; (2) parts, products, or accessories not sold by Westcoat such as sheet metal flashings, scuppers and drains; (3) the loss of gloss, fading or cleaning; (4) repairs and/or maintenance of the sealer and texture coat (5) the application of its materials over an oriented strand board ("OSB") substrate; (6) abuse or misuse of the materials; or (7) improper installation.

THIS MATERIAL WARRANTY AND THE REMEDIES PROVIDED HEREUNDER ARE EXCLUSIVE AND GIVEN IN LIEU OF ALL OTHER WARRANTIES (WHETHER WRITTEN, ORAL, IMPLIED OR STATUTORY). THERE ARE NO OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, THAT EXTEND BEYOND THAT SPECIFICALLY DESCRIBED HEREIN. PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURERS OF WESTCOAT, INCLUDING CLAIMS BASED UPON THE MANUFACTURER'S NEGLIGENCE OR STRICT LIABILITY, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE ALX MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL ALX MATERIAL.

The Westcoat ALX system requires a maintenance topcoat with WESTCOAT ACRYLIC TOPCOAT (or Westcoat Sealer) specified by a factory representative, every three to five years (depending on ultraviolet exposure and/or traffic) as determined by a Westcoat QCA OR authorized inspector. Inspections are required one year after installation and every two years thereafter by a Westcoat QCA or an authorized inspector. The record of the inspection must be kept in writing and entitlement to the benefits of this warranty require the purchaser to show proof of purchase of the materials and the record of inspection(s).


All claims arising from any defect in the ALX materials or under this Warranty shall be made, in writing, to Westcoat within ninety (90) days of the discovery of the alleged defect and within the time period of this warranty. Upon notification, Westcoat shall have the right to inspect and determine course of repair. The absence of a written claim within this time period shall constitute a waiver of all claims, rights and damages against Westcoat, and its affiliates. This warranty shall not toll or extend any statute of limitation applicable to a claim of negligence, breach of contract or strict liability against Westcoat.

Any and all disputes, claims or damages arising out of the use of ALX materials or this Warranty shall be arbitrated in the County of San Diego, State of California, utilizing the services of a neutral dispute resolution service upon which the purchaser and Westcoat agree, or if they cannot agree, utilizing the services of the American Arbitration Association. The purchaser and Westcoat hereby waive any right they may have to have a jury decide any dispute.



westcoat[™]

4007 Lockridge Street San Diego, CA 92102
800 • 250 • 4519 • Fax 619 • 262 • 8606 • westcoat.com

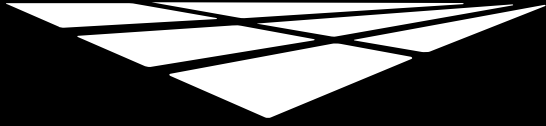

westcoat®

GENERAL MAINTENANCE



westcoat[®]
SPECIALTY COATING SYSTEMS

**CARE &
MAINTENANCE**

INTERIOR COATINGS

Westcoat interior coating systems (including such systems as: Thin Film, Grind and Seal, Dubro Quartz, etc.) offer durable, high-performance, long lasting surfaces, that are designed to provide years of service against normal wear and usage. Seamless flooring allows for greater ease of cleaning, compared to traditional resilient flooring, due to the absence of cracks, seams and crevices that can trap dirt and contaminants. To extend the service life of your Westcoat system, it is recommended to implement a routine cleaning regimen and have periodic inspections. This information is a basic guideline only.

Routine Cleaning

All coating systems require maintenance and upkeep to ensure continued performance and to maximize the life of the system. Maintenance methods may vary depending on the system, texture, topcoat or sealer, environment conditions, slope, drainage, volume and type of traffic, and use of space.

Ensure that the coating surface is free from debris, such as sand, gravel, metals, or other abrasives that can result in premature wear of the topcoat or sealer. Grease, oils, and other contaminants should be removed promptly to maintain the surface. Establish a routine maintenance schedule for all flooring systems. Be sure to test all cleaning agents in an unnoticeable area to ensure compatibility. Refer to the manufacturer's instructions and dilution rates for all cleaning agents. Routine cleaning can be achieved by using a mild cleaning solution, such as "Simple Green", neutral pH detergent or soap. Be sure to use clean mops and change out cleaning solution regularly. Utilize a brush, broom or mechanical scrubber to help agitate and loosen up dirt and debris, especially on textured floors. Ensure that the surface is rinsed with clean water thoroughly. Do not allow cleaning agents to dry on the surface. Buildup of residue or other foreign elements can make cleaning more difficult and can also negatively affect the slip resistance of the surface.

Floor auto-scrubbing machines can be used for larger areas. Avoid using abrasive pads or brushes and use long, soft brushes. Do not allow buildup of residue or other foreign materials, as this can result in a surface that is slippery when wet. Do not use metal-based or coarse brushes, as they may damage the surface.

Wax and Floor Finishes

Westcoat interior coating systems do not typically require a wax or a floor finish material. That said, in some cases where heavy traffic is present or where you may desire to enhance the finish, a standard, commercial floor finish, that is intended for use with resinous materials can be applied. Prior to application, ensure that the surface is clean and free from any debris or wax. Apply and maintain wax or floor finish per the manufacturer's guidelines. Wax or floor finishes will need to be completely removed prior to reseal application.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

1 of 2
General Maintenance INT 8/24



westcoat[®]
SPECIALTY COATING SYSTEMS

**CARE &
MAINTENANCE**

INTERIOR COATINGS

Maintenance and Inspections

All interior coating systems should be periodically inspected and regularly maintained by a Westcoat Qualified Contractor Applicator (QCA). Inspections are required one year after installation and every two years thereafter by a factory authorized representative. After 3-5 years, a "reseal" (thorough cleaning and reapplication of Westcoat topcoat/sealer) may be required. Existing sealer or coating should be abraded and wiped with solvent, before application of topcoat or sealer. Some topcoats and sealers may require additional preparation, prior to recoating. Should damage occur, be sure to contact the original Westcoat applicator to inspect and repair the coating system immediately.

Best Practices

- Do not expose the coating surface to traffic, moisture or chemical agents until system is fully cured.
- Immediately clean up and rinse off any chemical solutions that may stain or damage the surface.
- Do not subject the floor coating system to chemicals that it is not compatible or resistant to.
- Avoid dragging metal, concrete, pallets or other types of objects with sharp edges across the floor.
- Rolling loads with steel casters can potentially damage the surface and should be avoided.
- Avoid ponding or standing water, by ensuring that positive drainage is present before applying the floor coating system.
- Water should not be allowed to enter the flooring systems through penetrations, joints or edges.
- Furniture should have protective coasters or pads to prevent from indentations or damage.
- Tape and other adhesives should not be applied to finished floors, as this may damage the surface.

Any information provided by Westcoat Specialty Coating Systems is for general purposes only. Nothing presented by Westcoat Specialty Coating Systems constitutes design advice or a recommendation specific to a particular situation. Westcoat Specialty Coating Systems directs you to consult with the appropriate qualified design professional to ensure any product or information meets the requirements for the specific intended use, and complies with all building plans, specifications, codes or regulations. Westcoat Specialty Coating Systems expressly and specifically disclaims responsibility for any damages arising from the use of any information, and each recipient of this information agrees that there is no express or implied warranty, including any implied warranty of merchantability or fitness for a particular purpose, arising from any information provided by Westcoat Specialty Coating Systems.



westcoat[®]

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
General Maintenance INT 8/24