

	westcoat®	PRODUCT SPECIFICATION
CA	ACCESSORIES ADDITIVES & ACCESSORIES	CA-31 Large Safe Grip

Description

CA-31 Large Safe Grip is a Non-Skid Additive that can be added to epoxies, polyaspartics, sealers or topcoats to produce a skid resistant surface to help reduce slip hazards. This lightweight product will remain suspended in most coatings and leaves a more aggressive texture than CA-30.

Uses

CA-31 can be added to many Westcoat products, such as: EC-11 Water-Based Epoxy, EC-12 Epoxy Primer, EC-34 Epoxy Topcoat, EC-36 100% Solids Epoxy, EC-95G Gloss Polyurethane Topcoat, EC-101 Polyaspartic, EC-102 Polyaspartic, SC-10 Acrylic Topcoat, SC-42 Water-Based Acrylic Sealer, SC-65 WB Polyurethane Sealers, SC-70 Acrylic Lacquer Sealer and SC-71 High VOC Acrylic Lacquer Sealer to produce a skid resistant finish.

Advantages

Skid Resistance • Stays Suspended • Easy to Use • Works in Clear and Pigmented Coatings
 • Aggressive Texture for Greater Skid Resistance

Product Data			
Packaging	32 ounce bottle	Colors	White, but dries Clear
Coverages	N/A	Mix Ratio	32 ounces by volume per 5 gallons of: SC-10, SC-42, SC-70 or SC-71 32 ounces by volume per 3 gallons of: EC-11, EC-12, EC-34, EC-36, EC-95G, EC-101, EC-102 or SC-65
VOC Content	0 gm/l	Shelf Life	Indefinite in unopened packaging

Inspection

Surface must be prepared in the proper manner that is required in the System Specification sheet for the desired application.

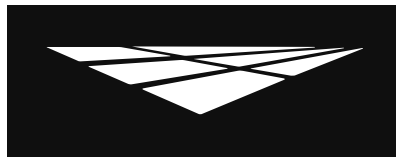
Preparation

Refer to appropriate System Specification sheet prior to installation.

Mixing

Mix 1 quart (32 ounces by volume) per 5 gallons of SC-10, SC-42, SC-70 or SC-71. Mix 1 quart (32 ounces by volume) per 3 gallons of EC-11, EC-12, EC-34, EC-36, EC-95G, EC-101, EC-102 or SC-65. This will leave a consistent texture that is still fairly easy to clean. The actual skid resistance will be greatly affected by the existing texture of the surface you are covering and the thickness of the coating applied. Do not exceed these amounts without consulting Westcoat.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

**westcoat®****PRODUCT
SPECIFICATION****CA****ACCESSORIES**
ADDITIVES & ACCESSORIES**CA-31 Large Safe Grip****Coverage**

For more information on coverage, please refer to the appropriate System Specification sheet.

Application

For more information on application, please refer to the appropriate System Specification sheet.

Dry Time

For more information on dry times, please refer to the appropriate System Specification sheet.

Clean Up

Uncured material can be removed with an environmentally-safe solvent. If cured, material can only be removed mechanically.

Limitations

- This product is designed for professional use only.
- Do not apply in temperatures below 55°F or above 95°F.
- Not intended for use with any Non-Westcoat brands.
- Not designed to be broadcast.
- It is strongly suggested that all limitations and attributes are disclosed to customer and end user.
- Westcoat takes no responsibility for slippery surfaces. The applicator and the customer determine the texture. If additional skid resistance is required, please contact Westcoat for recommendations.
- Do not use more CA-31 than recommended.
- Do not allow any Westcoat products to freeze.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

**westcoat®**

4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
CA-31 12/25