


SITE BUILT REGLET

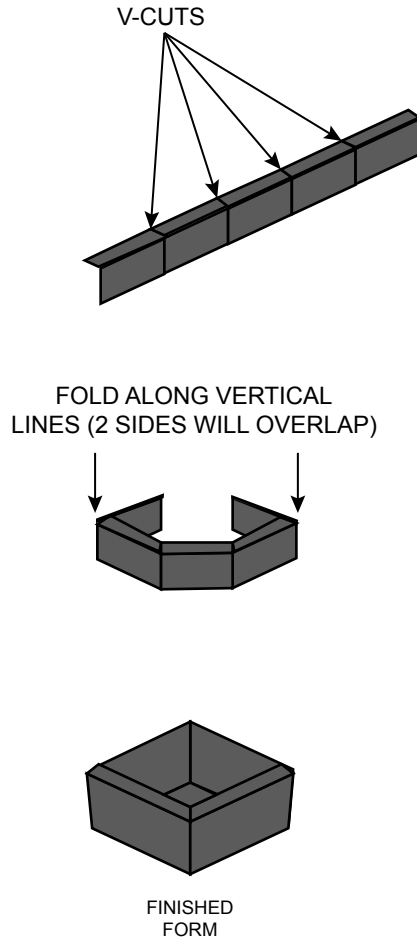

1/2" x 2" 26 GAUGE
BONDERIZED
SHEET METAL
FLASHING


4" x 4"
WOOD POST

1/2" x 2"
REGLET



4" x 6" 26 GAUGE
BONDERIZED
SHEET METAL
FLASHING

4" x 4" METAL INSERTS
UNDERLAID AT 45°

SITE BUILT FLASHING



FOLD AT EA. VERTICAL LINE
(2 SIDES WILL OVERLAP)



FINISHED
FORM



INSERT

NOTES:

- Apply WP-53 Hybrid Sealant on all flashing seams and overlaps.
- Standard overlap is bottom to top with a 4" overlap.
- Concrete substrates must be a minimum 2500 PSI.
- Refer to local building codes and standards
- Refer to appropriate System and Product Specification Sheets for additional information.

All details are for reference only and should be evaluated by architect. These details are not a substitute for specifications, plans or evaluation reports.
Architect, consultant or similar professional should review prior to major waterproofing applications.

REV. 5/5/25 TC

POST FLASHING & REGLET DETAIL

DIVISION 07 18 13
Pedestrian Traffic Coatings

SCALE : NTS



westcoat[®]

4007 Lockridge Street • San Diego, CA • 92102
800.250.4519 • westcoat.com