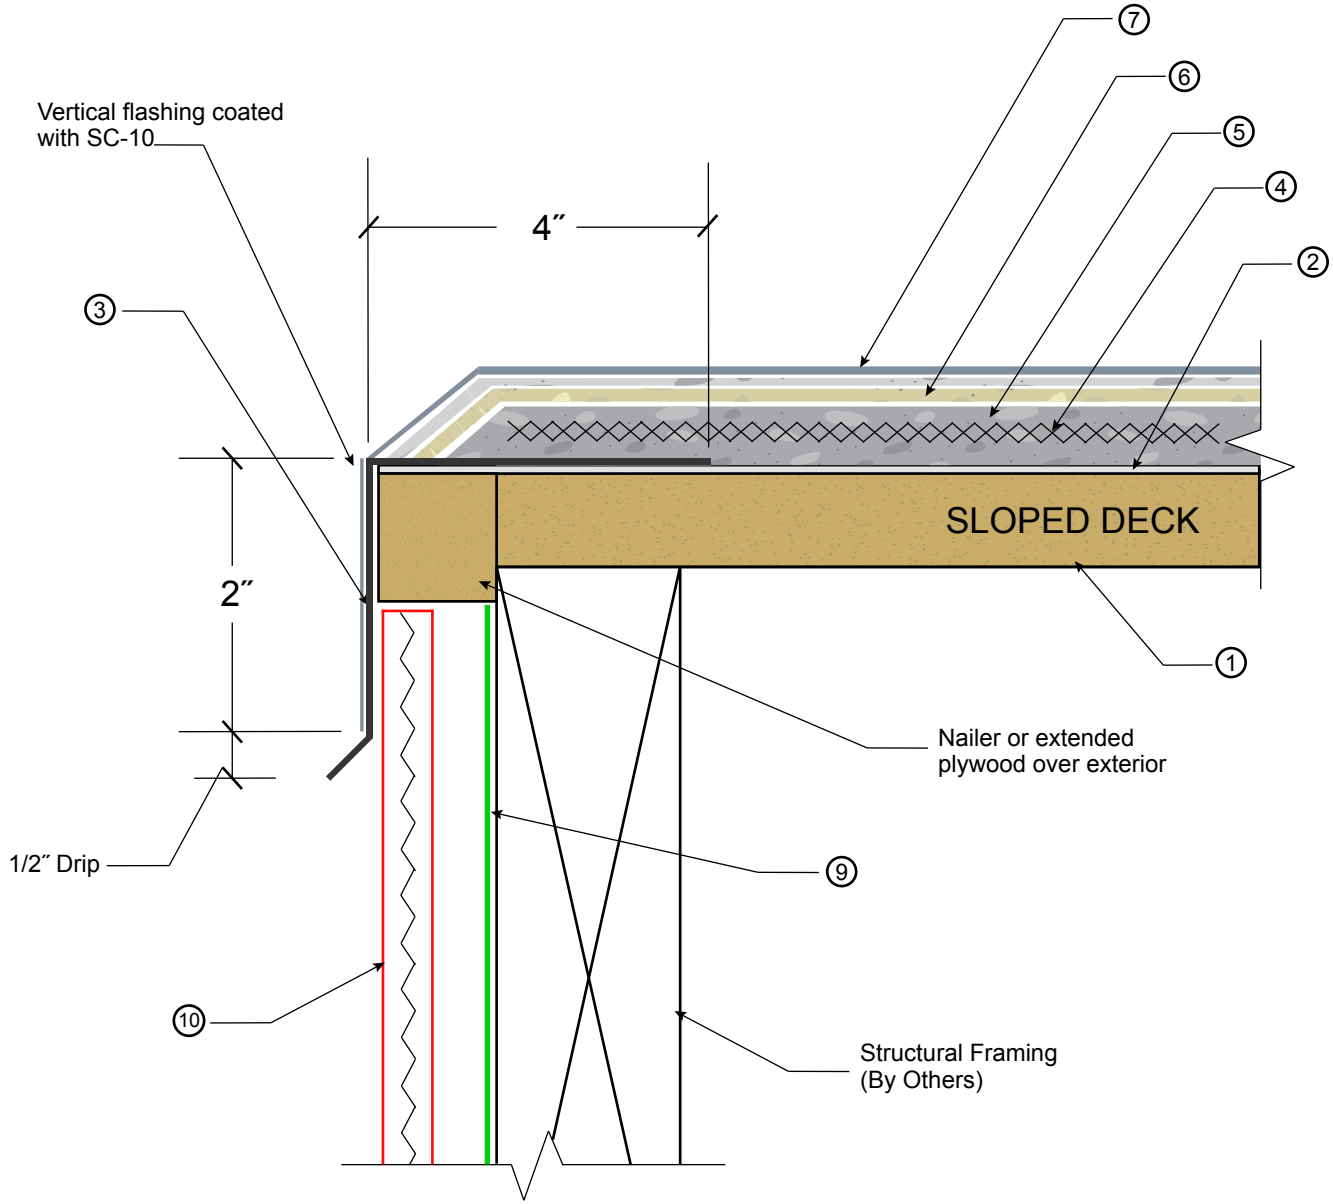

KEYNOTES

1. 5/8″ MIN. Exposure 1 Sheathing (3/4″ Recommended)
2. WP-40 Sheet Membrane
3. 26 Gauge, Bonderized Drip Edge Flashing
4. WP-25 Metal Lath or WP-30 Glass Lath
5. Base Coat
6. Fiberlath Resin Membrane
7. Slurry Coat
8. Texture Coat and Topcoat
9. Building Paper (By Others)
10. Stucco Finish (By Others)

IAPMO ER -587

- Metal Lath and Base Coat held back from edge by 2″
- Fiberlath Resin Membrane held back from edge by 1/2″
- Slurry Coat, Texture Coat and Topcoat applied to edge of deck.
- For maximum adhesion, WP-43 Sheet Membrane Primer should be used.
- Standard overlap is bottom to top with a 4″ overlap.
- Apply WP-53 on all flashing seams and overlaps.
- Minimum 5/8″ exterior grade plywood.
- Minimum 1/4″ slope required on all decks

All details are for reference only and should be evaluated by architect. These details are not a substitute for specifications, plans or evaluation reports. Architect, consultant or similar professional should be review prior to major waterproofing applications.

REV. 11/11/25 TC

ALX PRO - EDGE METAL FLASHING OVER STUCCO FASCIA

DIVISION 07 18 13
Pedestrian Traffic Coatings

SCALE : NTS

westcoat®
4007 Lockridge Street • San Diego, CA • 92102
800.250.4519 • westcoat.com